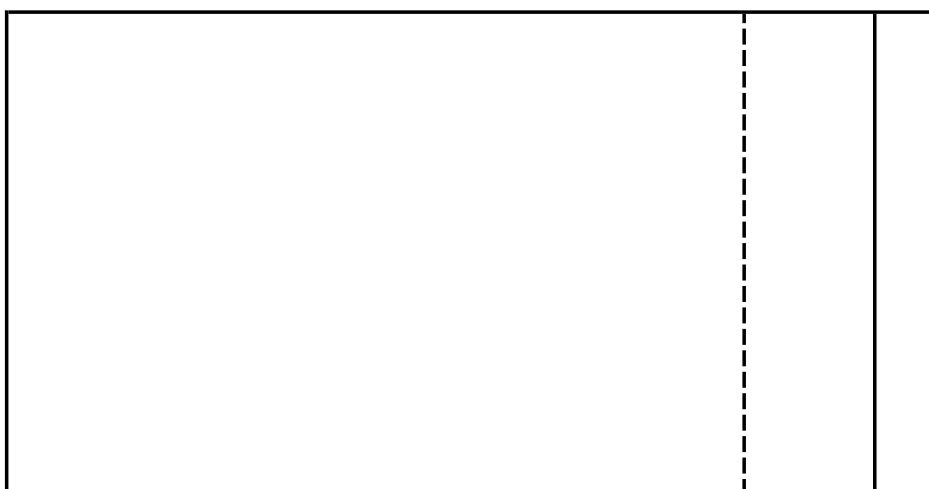
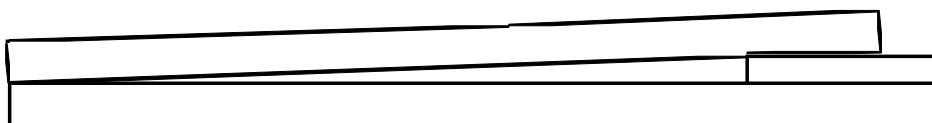


WEDGE CELL



▪ INDICATION & MARK

① WEDGE CELL		1
② SIZE		1
③ SPACER THICKNESS		1
④ EXCEPT STANDARD		1
▪ SPECIFICATION		2
▪ DIRECTION CHART		3
▪ PRICE LIST		4

The expiration of EHC cell is 6 months.

•INDICATION & MARK

INDICATION : **KC** **RK** - **07** **X**

① ② ③ ④

① 【KC】 MEANS WEDGE CELL.

② 【SIZE】

MARK	RK	RS
SIZE		

(NOTE) GLASS MATERIAL IS SODA LIME. THICKNESS IS $t_{1.1}$

③ 【SPACER THICKNESS】

MARK	THICKNESS	CLEARLY POINT
03	0.3mm	BLACK
05	0.5mm	BLUE
07	0.7mm	GREEN
11	1.1mm	RED

④ 【X】 MEANS EXCEPT STANDARD.

● DIRECTION FILM

•PROVISION : CONTACT ABOUT COATING & BAKING CONDITION

● RUBBING CONDITION

•CONDITION : ROTATION-SPEED STAGE-SPEED ROUND-TRIP-FREQUENCY

•DIRECTION : ARBITRARY ANGLE

▪ SPECIFICATION

DIRECTION FILM

◆ POLYIMIDE

- LX-1400 (HD MicroSystems)

◆ FILM METHOD

- SPIN COURT

RUBBING

◆ RUBBING ROLL

- FIBER : POLYESTER
- FIBER LENGTH : 8mm
- ROLL DIAMETER : 58mm

◆ RUBBING CONDITION

- ROTATIONAL SPEED : 600rpm
- STAGE SPEED : 30mm/sec
- ROUND TRIP FREQ. : 3 TIMES

◆ RUBBING DIRECTION

- REFERENCE PAGE 3

SEAL MATERIAL

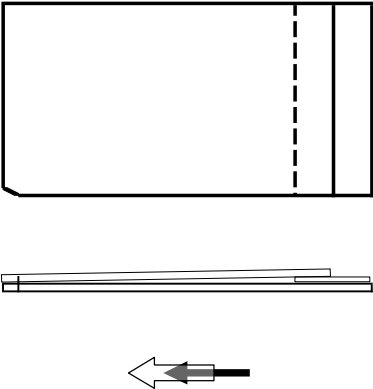
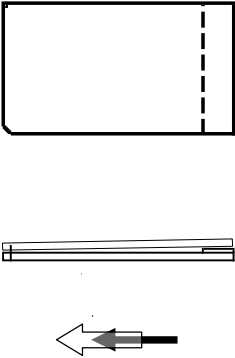


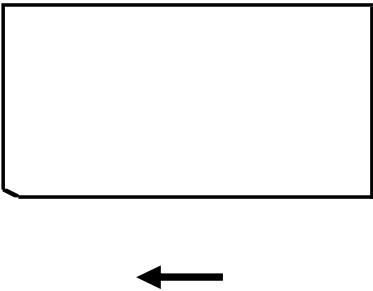

◆ UV RESIN (ACRYLIC)

$\tan \theta$

SPACER THICKNESS	KCRK	KCRS	ALLOWANCE (%)
0.3mm	0.0079	0.0115	+10
0.5mm	0.0131	0.0192	+8
0.7mm	0.0183	0.0269	+7
1.1mm	0.0288	0.0423	+5

(NOTE) SEALING FORM MIGHT CHANGE WITHOUT A PRIVIOUS.

• DIRECTION CHART

MARK	RK	RS
UNIT		
UP		
LOW		

▪PRICE LIST

NAME	MINIMUM(PCS)	UNIT PRICE (JAP.YEN)
KCRK-03	100	ESTIMATE
KCRK-05	100	ESTIMATE
KCRK-07	100	ESTIMATE
KCRK-11	100	ESTIMATE
KCRS-03	100	ESTIMATE
KCRS-05	100	ESTIMATE
KCRS-07	100	ESTIMATE
KCRS-11	100	ESTIMATE

EXCLUDING STANDARD

CONTENT OF CHANGE	UNIT PRICE (JAP.YEN)
DIRECTION MATERIAL	ESTIMATE
RUBBING CONDITION	
DIRECTION ANGLE	
GLASS MATERIAL	